


Technical data sheet

Type: KINGWON NO.373046
Compactor felts

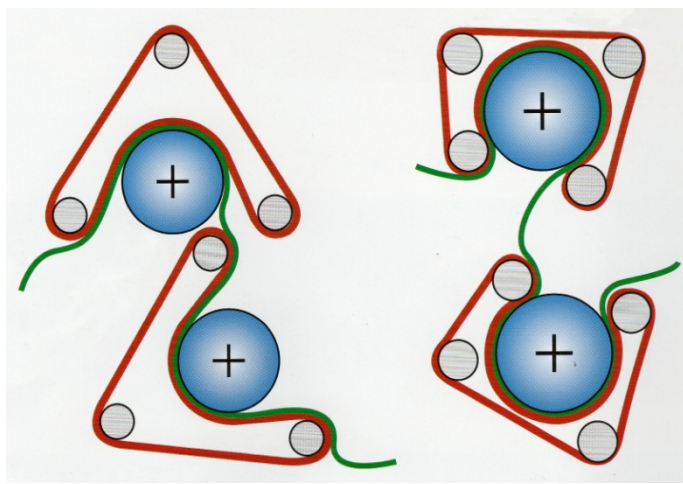

Description

- Support very flexible with high tensile and tear strength, also suitable for smaller shaft diameters.
- Surfaces equipped with high-temperature resistant material.
- We only use the highest quality base products.
- Clients can request various felt constructions and structures according to their own specifications.
- Felts of all thicknesses can be produced in an endless form thanks to modern production machinery.
- Long lifetime, the best cost-benefit effect.

Technical data

Material		Nomex, Polyester, Wool
Density		7600g/m ² ~8600g/m ²
Thickness		18mm~21mm
Width		600mm~3800mm, OEM
Inner circumference		1200mm~30000mm, OEM
Thermal shrinkage		≤1%
Work temperature	100%Nomex	230℃ -Heat Compacting m/c
	50%Nomex+50%Polyester	200℃ -Heat Compacting m/c
	30%Nomex+70%Polyester	160℃ -Steam Compacting m/c
	100%Polyester	160℃ -Steam Compacting m/c
Working life		6000 hours
Packing		Plastic film, Cushion, Woven bag.
Lead time		Within 15 days after deposit

further technical information available on request

SUNNY Ltd., 1504, BUILDING B,JINGHU CENTURY CITY,WUHU,ANHUI,PRC.
Tel: +86-553-3881595 ▪ Fax: +86-553-3881595
info@sunny-felts.com ▪ www.sunny-felts.com